

TEMPORAL DEVELOPMENT OF SCOUR AROUND WIDE PIERS

Nordila Ahmad¹, Zuliziana Suif¹, Jestin Jelani¹, Maidiana Othman¹

¹Department of Civil Engineering, Faculty of Engineering, National Defense University of Malaysia

ABSTRACT

Local scour depth around bridge piers is time dependent. It develops asymptotically towards the equilibrium depth of scour under clear-water scour. Scour is the major cause of bridge pier failure. Many equations are available for predicting temporal and equilibrium scour depth. The present study discusses the phenomenon of temporal scour depth variation at wide bridge piers and deals with the techniques for its estimation. Two type of pier shape (circular and rectangular) were used to collect the data. The rate of local scour, observed for different pier widths and sediment sizes, was recorded. The data indicates that 50% of the equilibrium scour depth ($0.5d_{sc}$) is achieved in a variety of times which range from 0.7% to 11% of t_e , according to the sediment coarseness values. Similarly, 80% of the equilibrium scour depth develops in a time varying from 10% to almost 50% of the equilibrium time. The upper limit curve for all the data also presented.

Keywords: Temporal Development, Local Scour, Equilibrium Time, Wide Piers

INTRODUCTION

The variation in time of local scour at bridge foundations is a crucial aspect of hydraulic engineering [1]. Recent research has emphasized the importance of temporal scour evolution rather than equilibrium scour depth [2–7], [14]. Numerous studies on abutments, simple and complex structures have been conducted [16-19]. Similarly, most equations of scour depth in the literature [8-13, 19] concentrate on local scour for piers of this type. However, little research or studies on the temporal development of scour, particularly around wide structures, are available.

The depth of local scour around bridge piers varies with time. It approaches the equilibrium depth of scour under clear-water scour asymptotically [15]. Under live-bed conditions, equilibrium depth is reached more rapidly, and scour depth thereafter oscillates due to the movement of bed features past the pier [2]. This condition is depicted clearly in Fig. 1, along with the equilibrium time, t_e , for the development of the equilibrium scour depth. The dashed lines represent the temporal average scour depth under conditions of a live-bed and clear water.

In order to achieve equilibrium conditions of clear-water scour depth development around bridge piers, it is necessary to run the experiments for several days. Data obtained after shorter times, say 10 to 12 h, can exhibit scour depths less than 50% of the equilibrium depth [2]. [15] presented the observation that many laboratory data describe the temporal development of local scour at narrow circular bridge piers (of diameter D) under clear-water conditions. The results are shown by the curves which indicate that local scour depths at the same point of development (t/t_e , where t_e is the time to develop the

equilibrium depth of scour) decrease at lower values of U/U_c .

In this study, temporal variation of local scour was investigated experimentally at different pier width, pier shape and different cohesionless bed sediments. The objective of this research was to clarify the effect of time on the development of scour depth at wide bridge piers under clear water conditions.

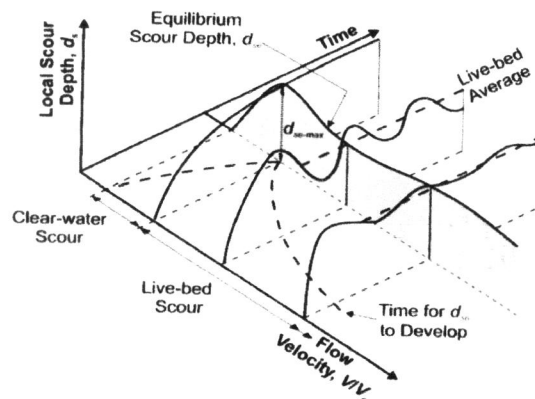


Fig. 1 Variation of local scour depth with flow velocity and time. (Source: [15])

RESEARCH SIGNIFICANCE

Scour at bridge piers are time-dependent. However, temporal evolution of scour at wide piers may show significantly different trends due to their sizes and the successive exposure of pier components during the scouring process. In this case, considering the limited data and lack of research on scour evolution at wide piers, it is not possible to predict the

time-dependent scour pattern with confidence for prototype piers in the field, where there is typically some pier width and scour holes are not fully developed. Therefore, the significance of this study is to obtain more experimental data, speculatively describing how the scour hole forms at wide piers, and investigating the relationship between scour temporal evolution and the equilibrium scour depth at two types of uniform bed cohesionless sediment.

EXPERIMENTAL FACILITIES

Flume characteristics

The test channel was 50 m long, 1.5 m wide and 2.0 m deep, provided with glass and brick walls. The flume features a working section in the form of a 10-m-long recess that was filled with sediment to a uniform thickness of 0.4 m. The sand-bed recess was located 13.5 m downstream of the flume inlet, with the test models installed in the middle of the sediment recess, 17.5 m downstream of the flume inlet. An adjustable tailgate controlled the water level within the flume. A 60 kW centrifugal variable speed pump supplied a flow rate of 0.14 m³/s through a 250 mm diameter pipe to the flume. A valve at the pipeline was used to control the discharge and water was supplied by the pumping system upstream of the flume.

Before each experiment, the sand bed was leveled and the flume carefully filled with water so as not to disturb the planar bed. The flow depth was maintained at 0.25 m for all of the experiments. Flow-velocity readings were measured using an area velocity module that was located on the streambed, upstream from the experimental area. A vertical point gage with 0.1 mm precision on the vernier scale was used to measure scour depth. In order to get a smooth flow transition, ramps located at the beginning and end of the sand bed recess were constructed with a slope of 1:5 (vertical: horizontal).

Tested material

Cohesionless uniform sediments were used as bed material with median particle sizes, $d_{50} = 0.23$ and 0.80 mm, and geometric standard deviation, $\sigma_g = 1.3$ and 1.26, respectively. The critical shear velocity, U^*c , and critical flow velocity, U_c , for sediment entrainment, were determined based on expressions given in [2]. The experiments were performed under clear-water conditions at threshold flow intensity $U/U_c \approx 0.95$, i.e. the flow intensity inducing maximum local scour depth, in which U is average approach flow velocity. Two type of pier shape were selected and five different pier diameters for each pier shape, 0.06, 0.076, 0.102, 0.140, and 0.165 m, were chosen for this study.

Table 1 Sediment characteristics of the tested material

Material	d_{16} (mm)	d_{50} (mm)	d_{84} (mm)	σ	sf
S1	0.2	0.23	0.3	1.30	1.0
S2	0.65	0.80	1.1	1.26	1.0

*sf= shape factor

Experimental procedure

The experiments were conducted until the equilibrium local scour depth was observed where the rate of change in the scour depth did not exceed 5% of the pier diameter in the succeeding 24-hour period [15]. Scour depth measurements were recorded at intervals of 10 minutes for 1 hour, followed by readings at intervals of 30 minutes for 2 hours and then every 1 hour for 24 hours or more.

RESULTS AND DISCUSSIONS

The temporal development of scour around piers

Local scour is a dynamic process for which the time scale of scour evolution is related to the size and strength of the local flow structure that causes the local scour as well as the particle size of the bed sediment. For varying pier width and sediment size, the depths of local scour should be compared with similar stages of scour development. For given piers and sediment sizes, the developments of scour were presented in terms of time. The rate of local scour, observed for different pier widths and sediment sizes, was recorded.

To investigate the effects of scour depth on temporal variation of local scour around wide piers, different values of b (pier width) were chosen in this study. The experimental data and flow condition are given in Table 2. The shapes of the scour holes for each pier shape for the two tested sediments after the flume was drained are shown in Fig. 2 to Fig. 5. They show that the larger the pier width, the wider the scour hole width became.

Temporal variation of local scour at wide piers

When all the data in the present study were merged with laboratory local scour data from the literature, the temporal variations were clearly shown in different stages, as presented in Fig. 6. In this figure, only data that had $b/d_{50} > 50$ were chosen where they corresponded to the wide pier category as stated by [9]. Three stages of local scour – (i) the initial stage, (ii) the main erosion stage, and (iii) the equilibrium stage – are described separately in the following sections.

Table 2. Experimental data for wide piers

Run	Sediment		Flow				Test Duration (h)	Eq. scour depth d_s (m)	Dimensionless parameter		
	d_{50} (mm)	σ_g	Water Depth y (m)	Velocity U (m/s)	Critical Velocity U_c (m/s)	scour depth b/d_{50}			ds/b	Sh	
1	0.165	0.23	1.30	0.25	0.27	0.285	23	0.197	717	1.19	C
2	0.140	0.23	1.30	0.25	0.27	0.285	23	0.167	609	1.19	C
3	0.102	0.23	1.30	0.25	0.27	0.285	22	0.125	443	1.23	C
4	0.076	0.23	1.30	0.25	0.27	0.285	22	0.106	330	1.39	C
5	0.060	0.23	1.30	0.25	0.27	0.285	13	0.071	261	1.18	C
6	0.165	0.80	1.26	0.25	0.27	0.285	18	0.182	206	1.10	C
7	0.140	0.80	1.26	0.25	0.27	0.285	20	0.133	175	0.95	C
8	0.102	0.80	1.26	0.25	0.27	0.285	19	0.116	128	1.14	C
9	0.076	0.80	1.26	0.25	0.27	0.285	17	0.073	95	0.96	C
10	0.060	0.80	1.26	0.25	0.27	0.285	13	0.065	75	1.08	C
11	0.165	0.23	1.30	0.25	0.36	0.380	21	0.257	717	1.56	R
12	0.140	0.23	1.30	0.25	0.36	0.380	20	0.196	609	1.40	R
13	0.102	0.23	1.30	0.25	0.36	0.380	20	0.159	443	1.56	R
14	0.076	0.23	1.30	0.25	0.36	0.380	20	0.125	330	1.65	R
15	0.060	0.23	1.30	0.25	0.36	0.380	13	0.089	261	1.48	R
16	0.165	0.80	1.26	0.25	0.36	0.380	25	0.244	206	1.48	R
17	0.140	0.80	1.26	0.25	0.36	0.380	21	0.185	175	1.32	R
18	0.102	0.80	1.26	0.25	0.36	0.380	21	0.148	128	1.45	R
19	0.076	0.80	1.26	0.25	0.36	0.380	20	0.105	95	1.38	R
20	0.060	0.80	1.26	0.25	0.36	0.380	14	0.090	75	1.50	R

Sh = pier shape

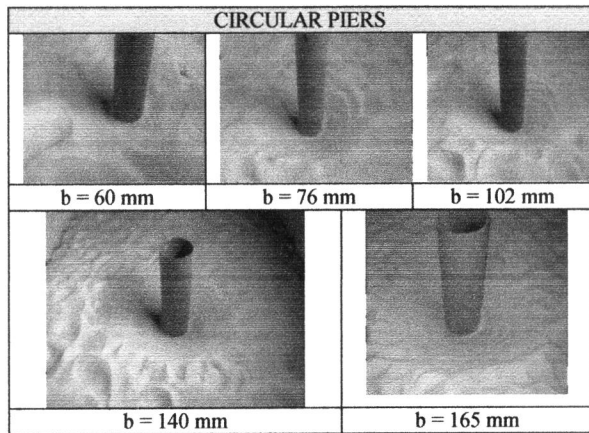


Fig. 2 Scour around the circular piers for $d_{50} = 0.23$ mm

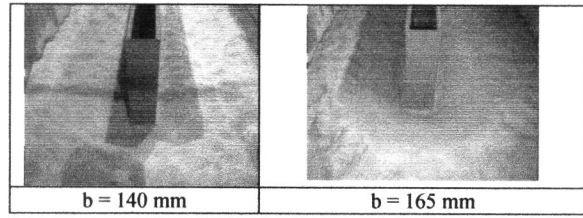
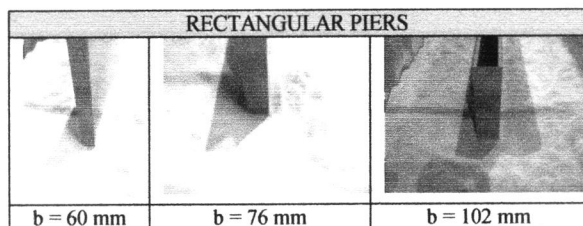


Fig. 3 Scour around the rectangular piers for $d_{50} = 0.23$ mm

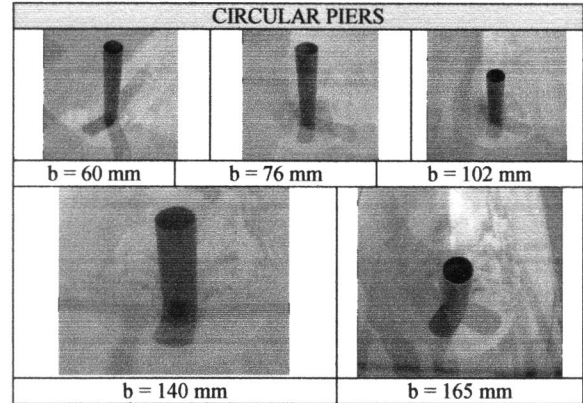


Fig. 4 Scour around the circular piers for $d_{50} = 0.80$ mm

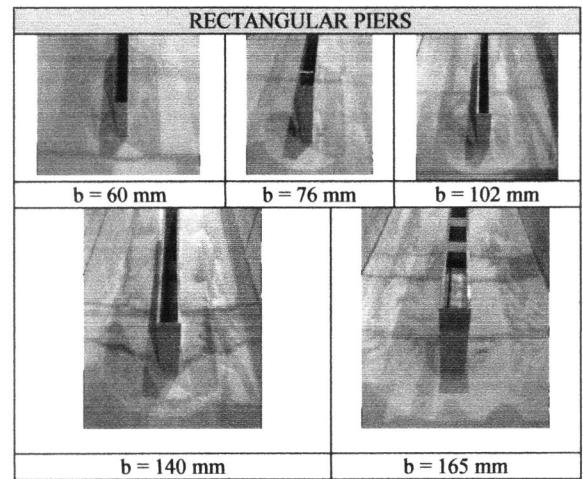


Fig. 5 Scour around the rectangular piers for $d_{50} = 0.80$ mm

The initial stage corresponds to the formation of the scour hole from the flat-bed condition. From the observation, the maximum depth of local scour initially formed at the sides and gradually moved to the leading edge or pier nose as the scour hole formed. The main erosion stage is characterised by the straight-line sections (on the log-normal plot) which describe the development of the scour hole up to its equilibrium stage. The equilibrium stage occurred when little or no change in scour depth was recorded with time. The analysis of the data is accompanied by

some photographs which illustrate the development of local scour for two types of pier in two sizes of uniform sediments as showed in Fig. 2 to 5. Those experiments were run within same duration as the present study. The durations were ranges from 24 to 29 hours.

The effect of equilibrium time on local scour depth

In order to clarify the effect of equilibrium time on the development of scour depth around circular and rectangular piers under clear-water conditions, the results for twenty experiments with different pier widths and two types of uniform bed cohesionless sediment are presented. Fig. 7 shows the temporal development of the scour hole plotted for d_s/d_{se} versus t/t_e , with the sediment coarseness as a third parameter. In this plot, d_{se} represents the scour depth at a particular time, t , while t_e is the equilibrium time. It shows a group of curves with the value of sediment coarseness, b/d_{50} , with a range from 75 to 717 for two types of uniform sediments around circular and rectangular piers. The data indicates that 50% of the equilibrium scour depth ($0.5d_{se}$) is achieved in a variety of times which range from 0.7% to 11% of t_e , according to the sediment coarseness values. Similarly, 80% of the equilibrium scour depth develops in a time varying from 10% to almost 50% of the equilibrium time. The data depicts the significance of time in the estimation of scour depth. The data in Fig. 7 can also be represented by the

following equation:

$$d_s/d_{se} = 0.067 \cdot \ln(t/t_e) + 1.023 \tag{1}$$

which is plotted in Fig. 8 and represents the upper limit curve or general equation for all the data.

CONCLUSIONS

This study is limited to local scouring at wide bridge piers with values b/d_{50} from 75 – 717 in uniform bed sediments. The following conclusions are drawn in this study – (a) the shape of scour hole show that the larger the pier width, the wider the scour hole width became; (b) when all the data in the present study were merged with laboratory local scour data from the literature, the temporal variations were clearly shown in different stages: (i) the initial stage, (ii) the main erosion stage, and (iii) the equilibrium stage. Those experiments were run within same duration as the present study. The durations were ranges from 24 to 29 hours; and (c) scour depth 10% to almost 50% of the time to equilibrium, the scour depth values vary between about 50% and 80% of the equilibrium depth, depending on the sediment coarseness. The data can be represented in Equation (1) and is plotted in Fig. 8, which represents the upper limit curve or general equation for all the data.

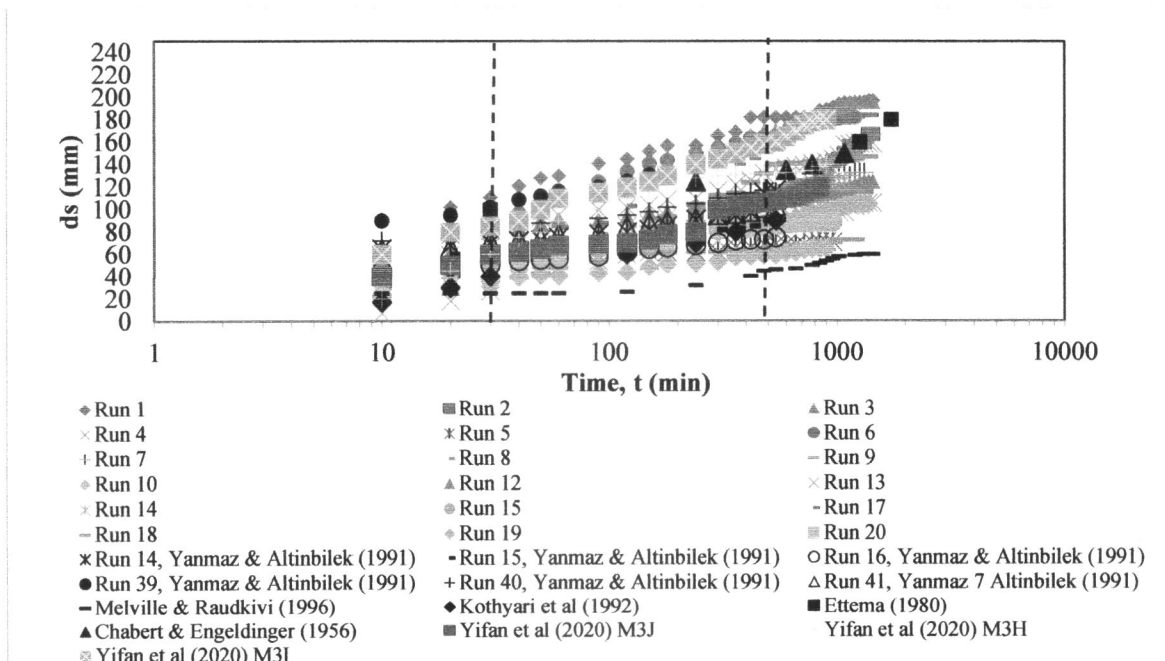


Fig. 6 Temporal variation of local scour depth at piers

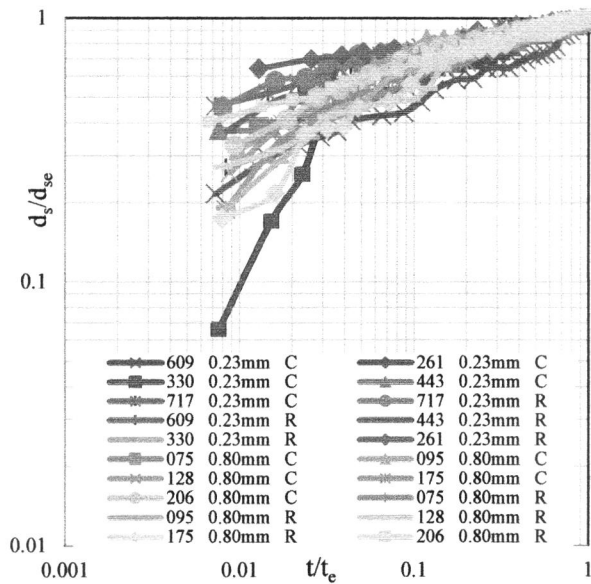


Fig. 7 New laboratory data showing the temporal development of scour depth

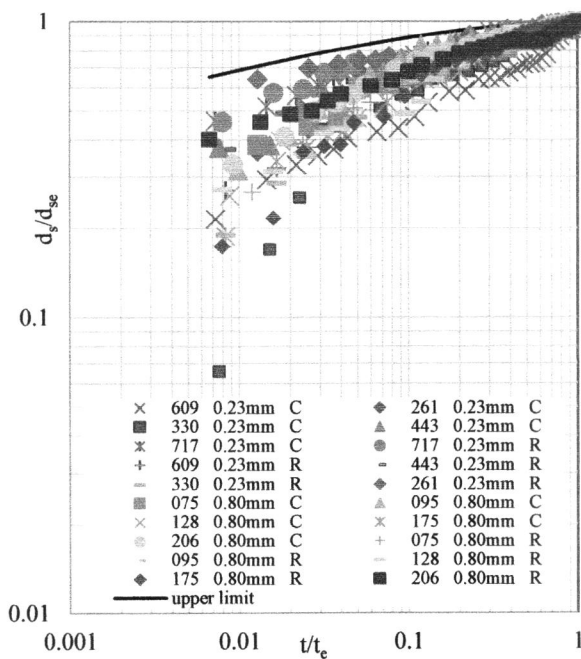


Fig. 8 Plot of Equation (1) indicating temporal development of local scour depth for flow intensity $U/U_c=0.95$

REFERENCES

[1] Dey S, Barbhuiya AK. Time variation of scour at abutments. *J Hydraul Eng-Asce* 2005;131(1):11–23.
 [2] B.W. Melville, S.E. Coleman(2000). *Bridge*

scour *Water Resources Publications Highlands Ranch, Colo*
 [3] M. Mia, H. Nago (2003). Design method of time-dependent local scour at circular bridge pier *J Hydraul Eng*, 129 (6), pp. 420-427
 [4] W. Chang, J. Lai, C. Yen (2004). Evolution of scour depth at circular bridge piers *J Hydraul Eng*, 130 (9) (2004), pp. 905-913
 [5] Simarro, G., Fael, C., and Cardoso, A. (2011). “Estimating equilibrium scour depth at cylindrical piers in experimental studies.” *J. Hydraul. Eng.*, 137(9), 1089–1093.
 [6] Lança, R., Fael, C., Maia, R.J. and Cardoso, A. (2010). “Clear-Water Scour at Comparatively Large Cylindrical Piers.” *J. Hydraul. Eng.*, 139(11), 1117–1125.
 [7] Lu, J. Y., Shi, Z. Z., Hong, J. H., Lee, J. J. and Raikar, R. V. (2011). “Temporal Variation of Scour Depth at Nonuniform Cylindrical Piers”. *Journal of Hydraulic Engineering*, Vol. 137, (9), 1089–1093.
 [8] Melville, B. W. (2014). “Local Scour at Bridge Piers: Predictions and Protections”. Sydney Water Engineering Panel. 23th June 2014, Sydney.
 [9] Sheppard, D. M., Odeh, M., and Glasser, T. (2004). “Large scale clear-water local pier scour experiments.” *Journal of Hydraulic Engineering–ASCE*, 130(10), 957–963.
 [10] Sheppard, D. M., and Miller, W. (2006). “Live-bed local pier scour experiments.” *Journal of Hydraulic Engineering–ASCE*, 132(7), 635–642.
 [11] Sheppard, D. M., and Renna, R. (2005). “Florida Scour Manual.” Florida Department of Transportation, Tallahassee.
 [12] Sheppard, D. M, Huseyin, D. Melville. B. W. (2014). Evaluation of Existing Equations for Local Scour at Bridge Piers. *Journal of Hydraulic Engineering–ASCE*, 140(1), 14–23
 [13] Sheppard, D. M., Ontowirjo, B., and Zhao, G. (1999). “Local scour near single piles in steady currents.” *Stream Stability and Scour at Highway Bridges, Compendium of papers, ASCE Water Resources Conferences 1991–1998*, E. V. Richardson and P. F. Lagasse, eds., ASCE, Reston, VA, 1809–1813.
 [14] Ibrahimy M. I. and S. M. A. Motakabber. (2015). Bridge Scour Monitoring by Coupling Factor Between Reader and Tag Antennas of RFID System. *International Journal of GEOMATE*, 8(2), 1328-1332.

Copyright © Int. J. of GEOMATE All rights reserved, including making copies, unless permission is obtained from the copyright proprietors.